



# DEPURAL® TOP

## WORKING CONDITIONS

Max working pressure \_\_\_\_\_ 3 bar (43 psi)  
 Max working temperature \_\_\_\_\_ 45°C (113°F)  
 Min working temperature \_\_\_\_\_ 4°C (39,2°F)

## SPECIFICATIONS

Non-toxic materials, suitable for drinking water.  
 Head: polypropylene.  
 White bowl: SAN.  
 O-rings: EPDM.



### DEPURAL® TOP ECO BW

#### WHITE HOUSING

CODE: RA2511615  
 SUITABLE CARTRIDGES: 10"



### DEPURAL® TOP DUO ECO BW



#### WHITE HOUSING

CODE: RA2521615  
 SUITABLE CARTRIDGES: 10"

### DEPURAL® TOP DUO DVB BW

#### WHITE HOUSING

CODE: RA2520618  
 SUITABLE CARTRIDGES: 10"

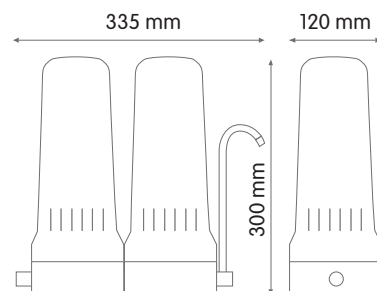

### DEPURAL® TOP TRIO ECO BW

#### WHITE HOUSING

CODE: RA2531615  
 SUITABLE CARTRIDGES: 10"

### DEPURAL® TOP TRIO DVB BW

#### WHITE HOUSING

CODE: RA2530615  
 SUITABLE CARTRIDGES: 10"

